

**Maximum  
Performance  
and Protection  
for Vehicles  
and Equipment**

**E-ZOIL**  
*Performance. Pour it on.*



# ***Performance. Pour it on.***

You have a big investment in your vehicles and equipment – cars, trucks, tractors, boats, dozers, excavators, cranes, generators, rail and more. You need your vehicles and equipment to work when you work – and look good, too. That's why we offer a complete line of diesel additives, biodiesel additives, and gas additives formulated to enhance fuel performance and provide critical protection against expensive breakdowns. We also make performance-enhancing cleaning products to keep your vehicles and equipment clean inside and out. We've been making performance products since 1980. Our products provide maximum performance, protection and return on investment for vehicle and equipment professionals worldwide. To learn more, visit [www.EZOIL.com](http://www.EZOIL.com).



All E-ZOIL diesel fuel additives comply with the federal ultra low sulfur content requirements for use in diesel motor vehicles and nonroad engines. All E-ZOIL diesel fuel additives are safe for use with ultra low sulfur diesel and biodiesel fuels. All E-ZOIL fuel additives are safe for use with oxidation catalysts and diesel particulate filters.

# Diesel Aid

## All-Season Performance Additive

*The best all-season performance diesel fuel additive, DIESEL AID enhances all-around performance and helps you avoid expensive breakdowns.*

- Improves Fuel Economy
- Totally Disperses Water
- Improves Cold Flow
- Improves Lubricity
- Inhibits Corrosion



### DIRECTIONS

**For Regular Preventative Maintenance:**  
Use 8 ounces to every 240 gallons of diesel fuel. Provides protection to 15°F (-9°C).

**To Control Waxing and Gelling:**

Use 8 ounces to every 120 gallons of diesel fuel. Provides protection to 10°F (-12°C).  
*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D10-08	8 OZ	24	240
D10-01	1 GL	6	3,840
D10-05	5 GL	1	19,200
D10-55	55 GL	1	211,200
D10-275	275 GL	1	1,056,000

# Diesel Aid + Cetane

## All-Around Performance Additive

*The best all-around diesel fuel performance additive. DIESEL AID + CETANE protects critical fuel system parts while improving power. DIESEL AID + CETANE increases cetane up to 7 points.*

- Increases Cetane
- Improves Fuel Economy
- Totally Disperses Water
- Improves Cold Flow
- Improves Lubricity
- Inhibits Corrosion



### DIRECTIONS

**For Regular Preventative Maintenance:**  
Use 16 ounces to every 240 gallons of diesel fuel. Provides protection to 15°F (-9°C).


**For High Performance:**

Use 16 ounces to every 120 gallons of diesel fuel. Provides protection to 10°F (-12°C).  
*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D25-16	16 OZ	12	240
D25-01	1 GL	6	1,920
D25-05	5 GL	1	9,600
D25-55	55 GL	1	105,600
D25-275	275 GL	1	528,000

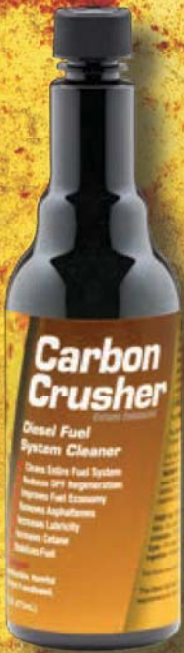

# Carbon Crusher

*Cetane Enhanced*

## Diesel Fuel System Cleaner

*The best all-around diesel fuel system cleaner, CARBON CRUSHER reduces fuel costs by cleaning the entire fuel system from top to bottom.*

- Cleans Entire Fuel System
- Reduces DPF Regeneration
- Improves Fuel Economy
- Removes Asphaltenes
- Increases Lubricity
- Increases Cetane
- Stabilizes Fuel

### DIRECTIONS

#### For Initial Use:

Use 8 ounces to every 50 gallons of diesel fuel.

#### For Subsequent Use:

Use 8 ounces to every 100 gallons of diesel fuel. To keep fuel system clean, use once every 10,000 miles.

*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D70-08	8 OZ	12	100 GL
D70-16	16 OZ	24	200 GL
D70-01	1 GL	6	1,600 GL
D70-05	5 GL	1	8,000 GL



# Bio-Blast

## Biocide Performance Additive

*The best diesel fuel biocide performance additive, BIO-BLAST kills microbial "slime" caused by bacteria and fungi that clog filters and cause unexpected breakdowns.*

- Kills Algae, Bacteria and Fungi
- Protects Fuel Lines and Filters from Plugging
- Protects Fuel and Water Phases from Microbial Slime

### DIRECTIONS

#### For Shock Treatment:

Use 16 ounces to every 640 gallons of diesel fuel.

#### For Regular Preventative Maintenance:

Use 16 ounces to every 1,280 gallons of diesel fuel.

*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
B70-16	16 OZ	12	1,280
B70-05	5 GL	1	51,200
B70-55	55 GL	1	563,200
B70-275	275 GL	1	2,816,000



# Artic Power

## All-Around Cold Weather Performance Additive

*The best all-around cold weather diesel fuel performance additive, ARTIC POWER protects against winter breakdowns while increasing cetane up to 4 points.*

- Improves Cold Flow
- Increases Cetane
- Improves Fuel Economy
- Improves Lubricity
- Reduces Exhaust Emissions

### DIRECTIONS

#### For Regular Preventative Maintenance:

Use 16 ounces to every 200 gallons of diesel fuel. Provides protection to -15°F (-26°C).

#### For Subzero Conditions:

Use 16 ounces to every 100 gallons of diesel fuel. Provides protection to -25°F (-32°C).

*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D15-16	16 OZ	24	200
D15-01	1 GL	6	1,600
D15-05	5 GL	1	8,000
D15-55	55 GL	1	88,000
D15-275	275 GL	1	440,000



# Artic Flo

## Cold Weather Performance Additive

*The best cold weather diesel fuel flow performance additive, ARTIC FLO protects against cold weather breakdowns. ARTIC FLO improves cold flow to keep your engine running during the coldest weather.*

- Improves Cold Flow
- Prevents Gelling
- Improves Lubricity
- Protects Fuel System

### DIRECTIONS

#### For Regular Preventative Maintenance:

Use 16 ounces to every 250 gallons of diesel fuel. Provides protection to -20°F (-29°C).

#### For Existing Problems:

Use 16 ounces to every 125 gallons of diesel fuel.

#### For High Paraffin Fuels:

Use 16 ounces to every 75 gallons of diesel fuel. Provides protection to -40°F (-40°C).

*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D20-16	16 OZ	24	250
D20-01	1 GL	6	2,000
D20-05	5 GL	1	10,000
D20-55	55 GL	1	110,000
D20-275	275 GL	1	550,000



# D-Gel

## Emergency Cold Weather Performance Additive

*The best emergency diesel fuel flow performance additive, D-Gel reliquifies gelled diesel fuel to get you running again.*

- Reliquifies Gelled Fuel
- Reliquifies Iced Fuel
- Deices Iced Fuel Filters
- Improves Cold Flow
- Helps Remove Water

### DIRECTIONS

#### If Engine is Not Running:

Remove or replace fuel filter. Add 16 ounces to fuel filter. Add 16 ounces to every 50 gallons of fuel. Do not start engine for 20-30 minutes to allow D-Gel to work.

#### If Engine is Running and There is No Power or Very Little Power:

Add 16 ounces to each 50 gallons of fuel and let engine continue to idle for 15 minutes before driving.

*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
F10-16	16 OZ	24	50
F10-01	1 GL	6	400
F10-05	5 GL	1	2,000
F10-55	55 GL	1	22,000
F10-275	275 GL	1	110,000



# Storzall

## Stabilizer Performance Additive

*The best fuel storage performance additive, STORZALL uses an anti-oxidant formula to inhibit fuel oxidation, protecting fuel system and engine components and helping prevent breakdowns. STORZALL preserves fuel for up to 12 months.*

- Stabilizes Fuel
- Prevents Fuel Degradation
- Protects Fuel System
- Safe for Gas, Diesel and Biodiesel

### DIRECTIONS

Use 16 ounces for every 200 gallons of diesel fuel.  
*For best results, add additive before filling tank.*

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
S80-16	16 OZ	12	200
S80-01	1 GL	6	1,600
S80-05	5 GL	1	8,000
S80-55	55 GL	1	88,000
S80-275	275 GL	1	440,000

# Diesel Fire

## Summer Performance Additive

*The best warm weather diesel fuel additive, DIESEL FIRE enhances all-around performance and helps you avoid expensive breakdowns. DIESEL FIRE demulsifies water, increases cetane up to 6 points, increases lubricity, and cleans fuel systems by removing deposits including those found in high pressure common rail engines.*

- Increases Fuel Economy
- Increases Cetane
- Increases Lubricity
- Cleans Fuel Systems
- Reduces Exhaust Emissions
- Separates Water



### DIRECTIONS

Use 8 ounces to every 32 gallons of diesel fuel. An overtreatment of additive is not harmful. For best results, add additive before filling tank.

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D50-08	8 OZ	12	32
D50-16	16 OZ	24	64
D50-01	1 GL	6	512
D50-05	5 GL	1	2,560
D50-55	55 GL	1	28,160
D50-275	275 GL	1	140,800

# Diesel Fire Plus

## Winter Performance Additive

*The best cold weather diesel fuel additive, DIESEL FIRE PLUS enhances all-around performance and helps you avoid expensive breakdowns. DIESEL FIRE PLUS demulsifies water, increases cetane up to 6 points, increases lubricity, improves cold flow, and cleans fuel systems by removing deposits including those found in high pressure common rail engines.*

- Increases Fuel Economy
- Improves Cold Flow
- Increases Cetane
- Increases Lubricity
- Cleans Fuel Systems
- Reduces Exhaust Emissions
- Separates Water



### DIRECTIONS

Use 8 ounces to every 32 gallons of diesel fuel. An overtreatment of additive is not harmful. For best results, add additive before filling tank. Provides protection -30°F (-34°C).

### ULSD FORMULA

E-ZOIL performance additives are formulated for today's Ultra Low Sulfur Diesel and Biodiesel Blends. They meet all emission standards and provide added protection for your valuable diesel- powered equipment.

PART#	SIZE	UNITS/CS	TREATS
D60-08	8 OZ	12	32
D60-16	16 OZ	24	64
D60-01	1 GL	6	512
D60-05	5 GL	1	2,560
D60-55	55 GL	1	28,160
D60-275	275 GL	1	140,800



# Bio-Aid

## All-Season Biodiesel Performance Additive

*The best all-season biodiesel performance additive, BIO-AID enhances all-around performance and helps you avoid expensive breakdowns.*

- Improves Fuel Economy
- Totally Disperses Water
- Improves Cold Flow
- Improves Lubricity
- Inhibits Corrosion

### DIRECTIONS

#### For Regular Preventative Maintenance:

Use 16 ounces to every 240 gallons of biodiesel fuel. Provides protection to 15°F (-9°C).

#### To Control Waxing and Gelling:

Use 16 ounces to every 120 gallons of biodiesel fuel. Provides protection to 15°F (-9°C).

*For best results, add additive before filling tank.*

### BIODIESEL FORMULA

E-ZOIL biodiesel performance additives are formulated to meet all emission standards and protect your valuable biodiesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
B10-16	16 OZ	24	240
B10-01	1 GL	6	1,920
B10-05	5 GL	1	9,600
B10-55	55 GL	1	105,600
B10-275	275 GL	1	528,000



# Bio-Power

## Cold Weather Biodiesel Performance Additive

*The best cold weather biodiesel performance additive, BIO-POWER prevents fuel gelling and waxing to keep your engine running during cold weather.*

- Improves Cold Flow
- Prevents Gelling
- Improves Lubricity
- Improves Fuel Economy

### DIRECTIONS

#### For Biodiesel Blends B1 to B5:

Use 16 ounces to every 200 gallons of biodiesel fuel. Provides Protection to -15°F (-26°C).

#### For Biodiesel Blends B6 to B20:

Use 16 ounces to every 100 gallons of biodiesel fuel. Provides protection to -15°F (-26°C).

Higher treatment rates may be required for particularly unresponsive biodiesel blends.

*For best results, add additive before filling tank.*

### BIODIESEL FORMULA

E-ZOIL biodiesel performance additives are formulated to meet all emission standards and protect your valuable biodiesel-powered equipment.

PART#	SIZE	UNITS/CS	TREATS
B15-16	16 OZ	24	200
B15-01	1 GL	6	1,600
B15-05	5 GL	1	8,000
B15-55	55 GL	1	88,000
B15-275	275 GL	1	440,000





# Hot Shot

## Heating Oil Treatment

*The best heating oil and waste oil heater performance additive, **HOT SHOT** enhances all around performance and helps protect your heating system against expensive breakdowns. **HOT SHOT** is also safe for use in waste oil heaters.*

- Totally Disperses Water
- Improves Combustion
- Cleans Fuel System
- Inhibits Corrosion
- Stabilizes Fuel
- Dissolves Sludge

### DIRECTIONS

**For Regular Preventative Maintenance:**

Use 16 ounces to every 275 gallons of heating oil.

**To Control Waxing and Gelling:**

Use 32 ounces to every 275 gallons of heating oil.

For best results, add additive before filling tank.

PART#	SIZE	UNITS/CS	TREATS
H15-16	16 OZ	24	275
H15-01	1 GL	6	2,200
H15-05	5 GL	1	11,000
H15-55	55 GL	1	121,000
H15-275	275 GL	1	605,000



# Phaze-Out

## Gas/Ethanol Performance Additive

*The best all-season performance gas/ethanol additive, **PHAZE-OUT** enhances all-around performance and helps you avoid expensive breakdowns. **PHAZE-OUT** prevents separation of E-10, E-15 and E-85 fuels. **PHAZE-OUT** is safe for use in cars, trucks, boats and 2 and 4 cycle engines.*

- Prevents Gas/Ethanol Separation
- Improves Combustion
- Cleans Fuel System
- Prevents Corrosion
- Stabilizes Fuel
- Safe for use in E-10, E-15 & E-85

### DIRECTIONS

**For Regular Preventative Maintenance:**

Use 1 ounce to every 5 gallons of fuel.

**For Existing Problems:**

Use 1 ounce to every 2.5 gallons of fuel.

For best results, add additive before filling tank.

PART#	SIZE	UNITS/CS	TREATS
G10-08	8 OZ	24	40
G10-01	1 GL	6	640
G10-05	5 GL	1	3,200
G10-55	55 GL	1	35,200
G10-275	275 GL	1	176,000



# Air Brake

## Air Brake Anti-freeze

*The best cold weather air brake antifreeze and conditioner, AIR BRAKE removes moisture and adds lubricity to protect against air brake freeze-ups and expensive breakdowns.*

- Prevents Air Brake Freeze-Ups
- Absorbs Water Immediately
- Lubricates Valves
- Inhibits Corrosion

### DIRECTIONS

Fill alcohol evaporator jar two-thirds full. When compressor is operating, bubbles should pass through AIR BRAKE. Be sure all connections are tight and in good condition.

PART#	SIZE	UNITS/CS
A30-32	32 OZ	12
A30-01	1 GL	4
A30-55	55 GL	1
A30-275	275 GL	1



# E-Z Kleen

## Vehicle Wash

*The best vehicle wash, E-Z KLEEN uses a high-performance formula to remove road film, diesel smoke, oil and grease from the exteriors of vehicles and equipment.*

- Removes All Dirt and Grime
- Removes Diesel Smoke
- No Water Spotting
- Use Pressure Washer or Hand Brush
- Safe on All Surfaces
- Biodegradable

### DIRECTIONS

Dilute 1 part E-Z KLEEN to 30-60 parts water depending on condition of surface to be cleaned. Always apply from bottom toward top, both on application and rinse. Do not allow surface to dry before rinsing. May be used in pressure washer, automatic type washers or applied by hand brushing. Product may be used with hot or cold water, but hot water will give faster cleaning.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
K50-01	1 GL	4
K50-05	5 GL	1
K50-55	55 GL	1
K50-275	275 GL	1



# E-Z Gone

## Water-Based Degreaser

**The best concentrated water-based degreaser, E-Z Gone uses a high-performance formula for light to medium duty industrial grease removal without the use of harsh chemical components.**

- Dissolves Grease, Grit & Grime
- Penetrates Quickly
- Fresh Lemon Aroma
- No Harmful Solvents
- Safe on All Metal Surfaces
- Use on Engines, Parts, Tools & Floors

### DIRECTIONS

For Engine, Machinery, and Equipment Cleaning:

Dilute 1 part E-Z Gone to 5-10 parts water depending on condition of surface to be cleaned. Rinse with water.

#### For Parts Washer:

Dilute one part E-Z Gone to 5-10 parts water.

#### For Floor Cleaning:

Dilute 1 part E-Z Gone to 10-20 parts water depending on condition of surface to be cleaned.

May be used as a pre-soak before steam or hot tank cleaning. Before using on a painted surface, test on an inconspicuous area.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
DG20-32	32 OZ	12
DG20-01	1 GL	4
DG20-05	5 GL	1
DG20-55	55 GL	1
DG20-275	275 GL	1



# E-Z Off

## Heavy-Duty Degreaser

**The best concentrated oil and grease solvent and emulsifier, E-Z OFF uses a high-performance formula for heavy-duty industrial grease removal.**

- Dissolves Grease and Grime
- Removes Diesel Smoke and Road Tar
- Rinses with Water
- Fresh Citrus Aroma
- Safe on All Metal Surfaces

### DIRECTIONS

For Motor Chassis, Machinery, and Equipment Cleaning:

Brush or spray on. Hose off with water.

#### For Parts Washer:

Immerse in still tank or agitate. Rinse with water. May be used as a pre-soak before steam or hot-tank cleaning.

#### For Floor Cleaning:

Apply with brush or mop. Rinse with water. For best results, do not dilute.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
DG10-01	1 GL	4
DG10-05	5 GL	1
DG10-55	55 GL	1
DG10-275	275 GL	1

# E-Z Brite

## Trailer Brightener

**The best concentrated acid trailer finish brightener, E-Z BRITE uses a high-performance formula to clean and brighten non-polished metal exterior surfaces.**

- Removes Oxidation and Corrosion
- Restores Original Finish
- For Non-Polished Metal
- Pressure Washer or Hand Brush

### DIRECTIONS

Dilute 1 part E-Z BRITE to 75 parts water for mildly oxidized surfaces. Increase concentration for severely oxidized surfaces. Always apply from bottom toward top, both on application and rinse. Allow E-Z BRITE to work for several minutes before rinsing. Do not allow surface to dry before rinsing. May be used in pressure washer, automatic type washers or applied by hand brushing. Keep off roof of trailer, paint, glass, ceramic, anodized aluminum as it can damage these surfaces. For best results clean surface first with E-Z KLEEN. For polished surfaces, use MIRROR X.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
T90-01	1 GL	4
T90-05	5 GL	1
T90-55	55 GL	1
T90-275	275 GL	1

# Mirror X

## Mirror Finish Brightener

**The best concentrated acid cleaner for mirror finish aluminum and stainless steel, MIRROR X uses a high-performance formula to clean and brighten polished exterior surfaces.**

- Removes Oxidation and Corrosion
- Restores Original Finish
- For Polished Metal
- Non-Chalking and Non-Whitening
- Safe for Glass and Painted Surfaces
- Pressure Washer or Hand Brush

### DIRECTIONS

Add 4 ounces of MIRROR X to 1 gallon of water for mildly dirty surfaces. Increase concentration of MIRROR X for dirtier conditions. Always apply from bottom toward top, both on application and rinse. Allow MIRROR X to work for several minutes before rinsing. Do not allow surface to dry before rinsing. May be used in pressure washer, automatic type washers or applied by hand brushing. For best results clean surface first with E-Z KLEEN. For non-polished surfaces, use E-Z BRITE..

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
M70-01	1 GL	4
M70-05	5 GL	1
M70-55	55 GL	1
M70-275	275 GL	1



# Glass Glitz

## The "Grippy" Glass Cleaner

- Cleans Glass
- Thickens When Shaken
- Grips to Glass for Fast Cleaning
- Provides Streak-Free Shine
- Removes Films, Soils, and Bugs
- Won't Evaporate on Hot Surfaces
- Ammonia-Free

### DIRECTIONS

Shake well and spray on surface to be cleaned. Wipe with a paper towel or lint-free cloth. Glass Glitz will not smear or streak and requires no rinsing. Glass Glitz even helps prevent smears, smudges and fingerprints from reoccurring.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
V20-02	2 OZ	24
V20-32	32 OZ	12



# Cab Kleen

## All Purpose Plastic and Carpet Cleaner

*The best all-purpose vehicle interior cleaner, CAB KLEEN uses a high-performance formula safe for plastic, leather and carpet.*

- Removes Dirt
- Removes Stains
- Fast Cleaning Action
- For Carpet, Upholstery, and Dashboard

### DIRECTIONS

Spray on surface to be cleaned. Allow CAB KLEEN to penetrate surface. Wipe with a clean, damp cloth. Heavily stained areas may require rubbing with a soft brush. Before using on an unknown surface, test on an inconspicuous area first.

### BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
V30-02	2 OZ	24
V30-32	32 OZ	12
V30-01	1 GL	4
V30-05	5 GL	1
V30-55	55 GL	1

# Hardy Hands Hand Cleaner

*The best hand cleaner, HARDY HANDS uses a high-performance formula containing walnut shell scrubbers to remove the toughest dirt and grime.*

- Removes All Dirt and Grime
- Contains Walnut Shell Scrubbers
- Leaves Hands Soft and Clean
- No Greasy Residue
- Fresh Citrus Aroma
- Formula Reduces Use By Up To 75%

## DIRECTIONS

Apply to hands, knuckles, palms and fingers. Then add a small amount of water, lather and rinse; or, wet hands, apply to hands, knuckles, palms and fingers, lather and rinse.

## BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
C10-03	3 OZ	96
C10-13	13 OZ	12
C10-85	85 OZ	4
C10-DS	N/A	12

# Hardy Wipes

## Hand, Tool & Surface Towels

*The best hand, tool and surface towel, HARDY WIPES use a high-performance formula to remove dirt, grime, grease, oil, tar and many other soils. HARDY WIPES are two-sided and can be used as a hand and tool cleaner or a surface wipe.*

- Removes All Dirt and Grime
- Strong Two-Sided Towels
- Abrasive Side Cuts Through Soils
- Smooth Sides Wipes Surface Clean
- Leaves Hands Soft and Clean
- No Greasy Residue
- Fresh Citrus Aroma
- Contains Natural Ingredients

## DIRECTIONS

Remove lid by lifting upward. Pull towel from center of roll and thread through "X" on the underside of lid. Close lid. Pull towel at a 90° angle. Snap hinged cap back into place to ensure towels remain moist.

## BIODEGRADABLE FORMULA

E-ZOIL performance cleaners are formulated for tough cleaning jobs and are safe for the environment when used as directed.

PART#	SIZE	UNITS/CS
C20-25	25CT	12
C20-70	70CT	6



# Bulk Diesel Fuel Additives

*Join the growing number of customers that take advantage of the convenience and savings!*

*The best way to have all your favorite diesel fuel additives in stock is to order them in bulk. Whether you have a fleet of 2 or 200 power units you'll receive huge savings. We supply 5, 55 and 275 gallon bulk containers to fuel carriers, fleets and any business that needs the convenience.*

275 Gallon Totes



55 Gallon Drums

5 Gallon Pails



**E-ZOIL**  
Performance. Pour it on.

E-ZOIL Products, Inc.  
234 Fillmore Avenue  
Tonawanda, New York  
14150

716-213-0106  
EZOIL.com  
info@ezoil.com